




## **STANDARD INSTITUTIONAL CASTORS** **PLATE FIXING**

**Pressed steel, electro zinc plated, double ball bearing swivel.**

**Available in:**

- 2470 - Swivel**
- 2478 - Fixed**
- 2475 - Wheel lock**
- 2477 - Total lock**

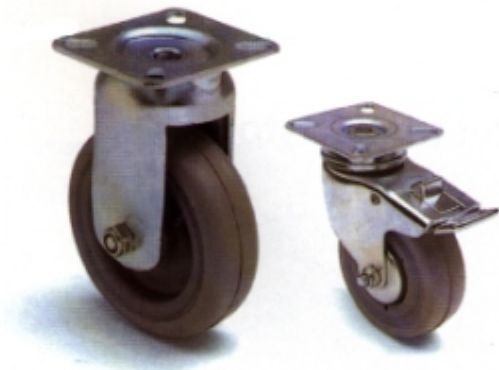

WHEEL DIA. mm	TREAD WIDTH mm	WHEEL TYPE	CAPACITY KG	OVERALL HEIGHT	SWIVEL REF.	FIXED REF.	SWIVEL PLATE WITH WHEEL BRAKE REF.	SWIVEL PLATE WITH TOTAL BRAKE REF.	PLATE SIZE
50	19	RUBBER P	40	70	2470PJ0050P40	2478PJ0050P40	2475PJ0050AP40		60x60
		NYLON P	50		2470P00050P40	2478P00050P40	-		
75	25	RUBBER P	55	102	2470PJ0075P40	2478PJ0075P40	2475PJ0075P40	2477PJ0075P40	60x60
		NYLON P			2470P00075P40	2478P00075P40	-		
100	28	RUBBER R	80	137	2470PJR100P40	2478PJR100P40	2475PJR100P40	2477PJR100P40	77x67
		NYLON P			2470P00100P40	2478P00100P40	-		
125	32	RUBBER R	100	162	2470PJR125P40	2478PJR125P40	2475PJR125P40	2477PJR125P40	77x67
		NYLON P			2470P00125P40	2478P00125P40	-		

**Wheel type - P=Plain bore, R=Roller bearing**

